




Customer Service: 800-367-2810  
Online: [www.ballarddesigns.com](http://www.ballarddesigns.com)

PRODUCT NAME: ARIELLE CHANDELIER- LRG.

ITEM NUMBER: LC882

DIMENSIONS OF ITEM ASSEMBLED: 33" H x 38 3/4" DIA

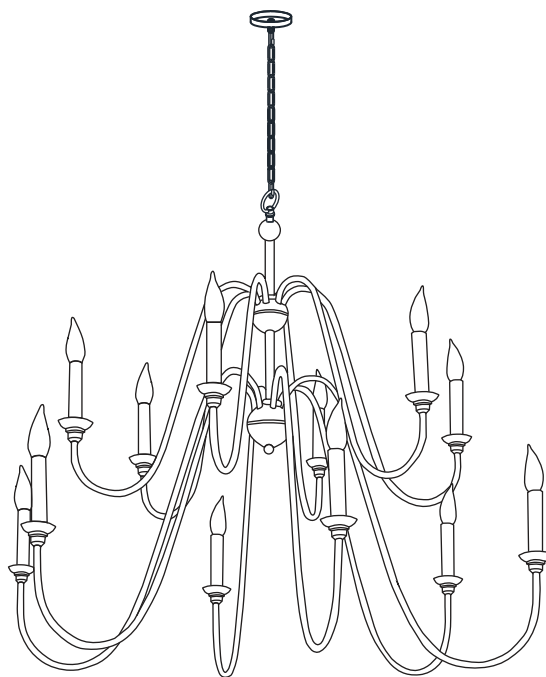

#### IMPORTANT SAFETY INSTRUCTIONS:

- We strongly recommend that a professional electrician install all direct wire fixtures.
- These Assembly Instructions are provided for your safety. It is important that they are read carefully and completely before assembling this Fixture.
- This product must be installed with the applicable installation code by a person familiar with the construction and operation of the product.
- This Fixture has been rated for up to 60 Watt MAX Type B Candelabra Bulb (NOT Included).
- Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

#### WARNING:

- Deviation from the Assembly Instructions may result in a risk of fire or electric shock.
- To reduce risk of fire, electrical shock, or personal injury, always turn off Fixture and allow it to cool prior to replacing the bulb.
- Do not touch the bulb when the Fixture is turned on. Do not look directly at the lit bulb.
- Keep flammable material away from the lit bulb.

PRODUCTS ARE NOT INTENDED  
FOR COMMERCIAL USE.

MADE IN PHILIPPINES

Page 1 of 5

**NOTE:** Remove all parts and hardware from the box along with any plastic protective packaging and carefully lay all the parts out on a clean, flat surface.

DO NOT discard any contents until after assembly and installation is complete to avoid accidentally discarding small parts or hardware.

Recommended Location for Use: Dry Indoor Environment

Assembly Time: 30 Minutes


People Required: One or more

Tools Required: Screwdriver, Wire Strippers, Wire Cutters, Electrical Tape

## PARTS

Check to make sure you have the following:

INCLUDED:



1-Canopy (A)



1-Chain (F)



2-Mounting Screws (B)



1- Lock Nut (G)



1- Nipple (C)



2- Cap Nut (H)



1-Canopy Loop (D)



2- Threaded Rod (I)



1-Mounting Bar (E)



1- Ground Screw (J)

NOT INCLUDED:



12- 60 Watt Max  
Type B Chandelier Bulb

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


### STEP 1:

Remove the existing fixture- loosen the locknut while holding the canopy plate with one hand. Lower the canopy plate. This exposes the outlet box that holds the wiring. Save the Wire Connector Caps.

Determine the distance to suspend your chandelier from the ceiling and if necessary, remove the extra links from the chain and reconnect the chain to the nipple.

### STEP 2:


The electric supply wire that is woven through the chain should be cut off 12 inches longer than the chain. Cut the braided copper wire the same length.

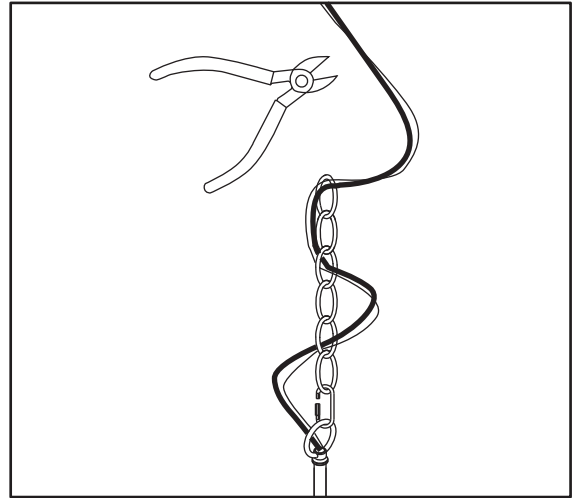

### STEP 3:

Next, split the supply wire down the center by a length of 3 inches and strip 3/4 inch of insulation off the end of each wire.


If you look closely, you will notice that the plastic insulation of one of the two split wires has a rib on the outside edge. This ribbed wire is the “neutral” wire and the other is the “hot” wire; you will need to remember the difference when you connect these to the house wires in the electrical box.

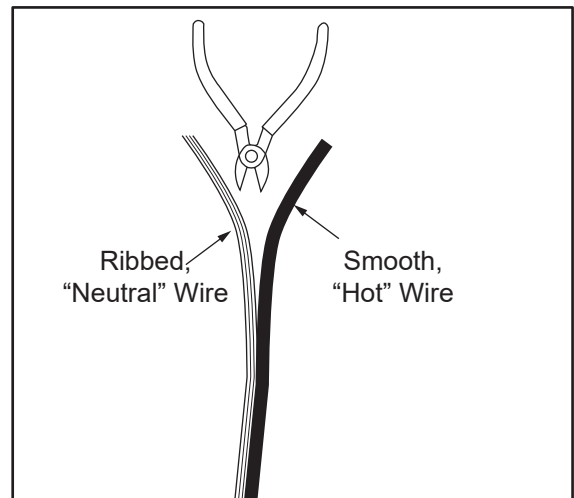

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

#### STEP 4:

Weave the stripped wires and the copper wire through the Chain (F) about every third link.

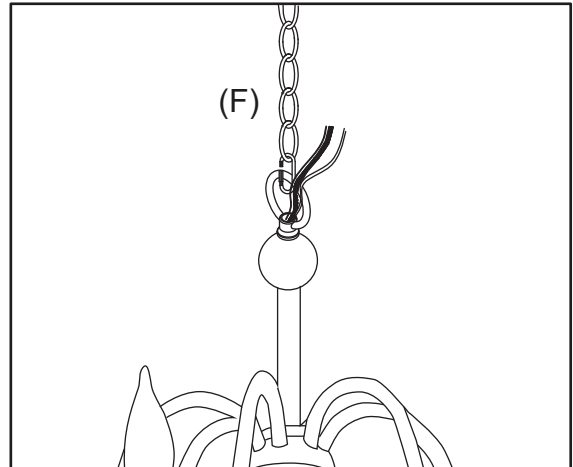


#### STEP 5:

Insert the two stripped wires and the braided copper ground wire through the Canopy Loop (D), Lock Nut (G), Nipple (C), Canopy (A), and Mounting Bar (E).

Once through the Canopy, connect the braided copper wire to the green Ground Screw (J) marked "GRD" on the Mounting Bar.

NOTE: The weight of the Fixture must be taken by the Chain.

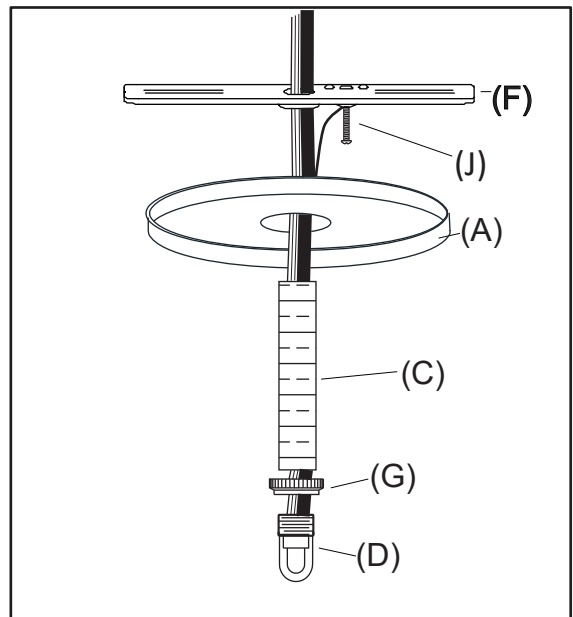


#### STEP 6:

Attach the ribbed wire to the white "neutral" house wire and the un-ribbed, smooth wire to the black "hot" house wire. Cover the connections using the Wire Connector caps.

#### STEP 7:

Gently push the wiring back into the outlet. Screw the Canopy Loop, Lock nut and Canopy into the Mounting Strip and turn until the Canopy is snug against the Ceiling.

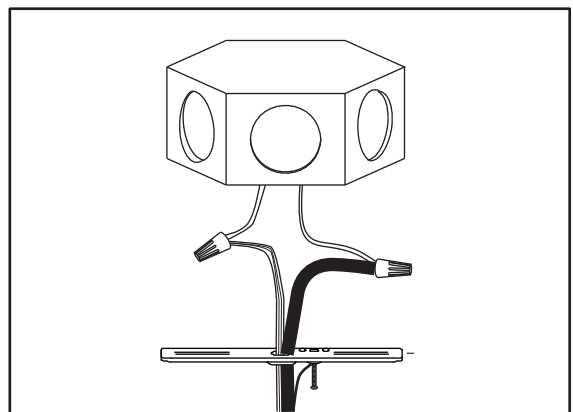

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

**STEP 8:**


Screw Threaded Rod (I) through Canopy (A) and secure with Cap Nut (H). Tighten until snug.

**STEP 9:**

Screw in the Bulbs. This Fixture has been rated for up to 60 Watt MAX Type B Candelabra Bulb. (Not Included)

**STEP 10:**

Connect breaker and turn on Light.

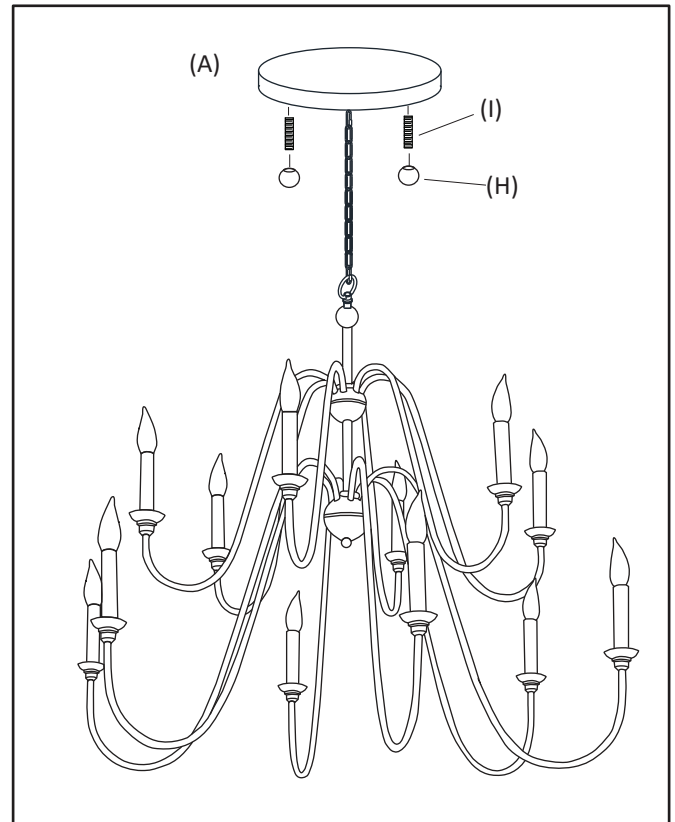

**Cleaning & Care:**

Dust with a soft dry cloth. To protect finish, do not use cleaners or abrasives.