




PRODUCT NAME: Miles Hanging Sconce

ITEM NUMBER: LW649

ASSEMBLED DIMENSIONS: 21"H x 6"W x 15 1/2" Projection

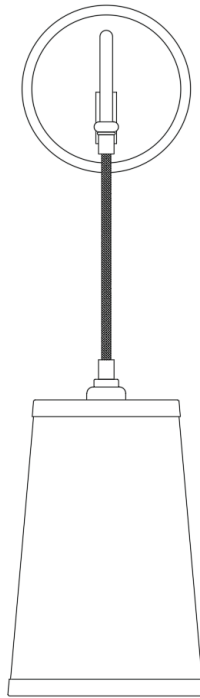

## IMPORTANT SAFETY INSTRUCTIONS:

---

- A licensed professional electrician should install direct wire fixtures.
- For your safety, please read instructions carefully and completely before beginning assembly or installation. If unsure, contact a licensed electrician.
- Fixture must be installed according to applicable code(s) by a person familiar with its construction and operation. If unsure, contact a licensed electrician.
- Fixture rated up to 60 Watt MAX Type A Medium Base bulb (not included). LED recommended.
- Prior to installation or removal of a previous fixture, disconnect power by turning off power at circuit breaker or removing fuse at electrical panel.

## WARNING:

---

- Deviation from assembly instructions may cause risk of fire or electric shock.
- To reduce risk of personal injury, always turn off fixture and allow bulbs to cool prior to replacement.
- Do not touch or look directly at illuminated bulbs.
- Keep flammable material away from illuminated bulbs.



**Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.**

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level surface.



**Prevent accidentally discarding small parts or hardware. Retain all carton contents until assembly and installation are complete.**


**Approved Location for Use: Dry or \*Damp Indoor Environment**

\* protected and not subjected to water saturation.

**Assembly Time: 15 minutes**


**People Required: 1 or more**

**Tools Required: Screwdrivers (Phillips and Blade), Electrical Tape, Wire Strippers, Wire Cutters, Pliers**

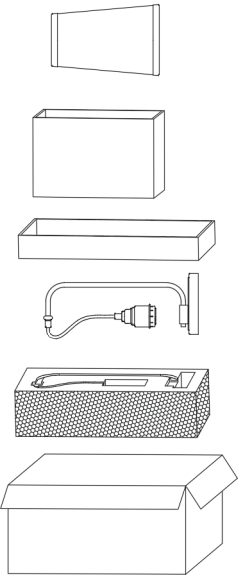

## HARDWARE AND COMPONENTS


### INCLUDED:

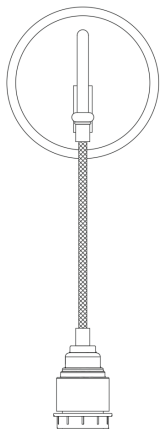


**1 - Fixture Body (A)**  
w/attached Socket Ring



**2 - Mounting Screws (C)**  
8/32" x 32T x 1 1/4"



**1 - Mounting Bracket (D)**




**2 - Backplate Set Screws (B)**  
8/32" x 32T x 1/2"




**3 - Wire Connectors (E)**

### NOT INCLUDED:



**1 - 60 Watt MAX**  
**Type A Medium Base Bulb**  
\*LED recommended



**1- Shade (F)**



### Cleaning and Care

Periodically wipe Fixture with a soft, dry cloth.  
Avoid harsh or abrasive chemicals as  
finish damage may result.



Customer Service: 800-367-2810  
Online: [www.ballarddesigns.com](http://www.ballarddesigns.com)





**Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.**

## STEP 1: INSTALL MOUNTING BRACKET

Place Mounting Bracket (D) over Junction Box with SIDE TABS vertically level (Fig 1.) Attach to Junction Box using both Mounting Screws (C).



**NOTICE:** To ensure proper fixture installation, level **SIDE HOLES** horizontally. Backplate is secured **FROM OUTSIDE** by Set Screws.

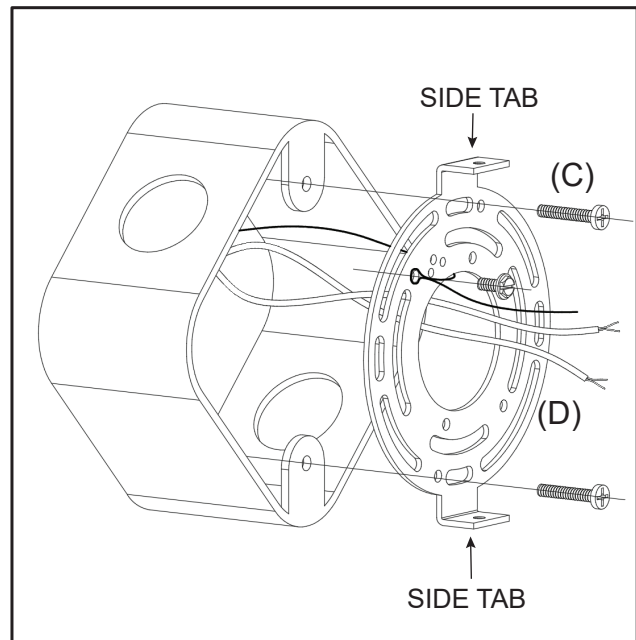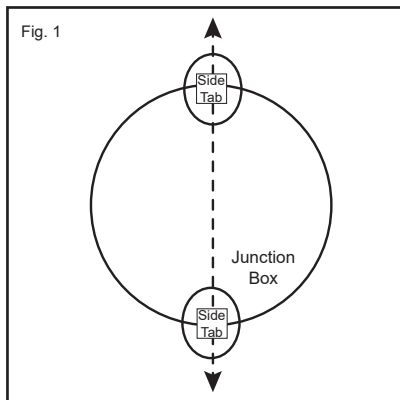


## STEP 2: CONNECT ELECTRICAL

If necessary, strip wire ends of 1/2" of insulation then attach bare (or green) ground wire from Fixture to bare (or green) ground wire from Junction Box and attach using Wire Connector (E). Wrap both around Green Ground Screw on Mounting Plate (D) and firmly tighten.

**⚡ TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY:**

Connect **BLACK** wires to **BLACK**.

Connect **WHITE** wires to **WHITE**. Firmly secure all connections with a Wire Connector (E).

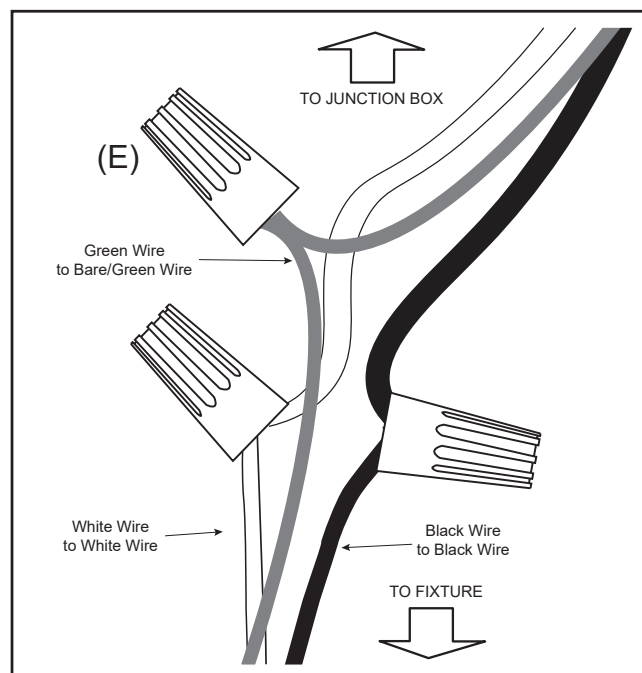

**WARNING**  
Electrical Shock Hazard

Handle Electrical Wires with Care  
Do Not Crimp or Tear Wire Insulation




Customer Service: 800-367-2810  
Online: [www.ballarddesigns.com](http://www.ballarddesigns.com)



**Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.**

### STEP 3: ATTACH FIXTURE

Gently lift wired Fixture to Mounting Bracket (D) while carefully tucking wires into Junction Box. Align holes on side of Fixture Body (A) with Side Tabs on Mounting Bracket then insert each Backplate Set Screw (B) and fully tighten.

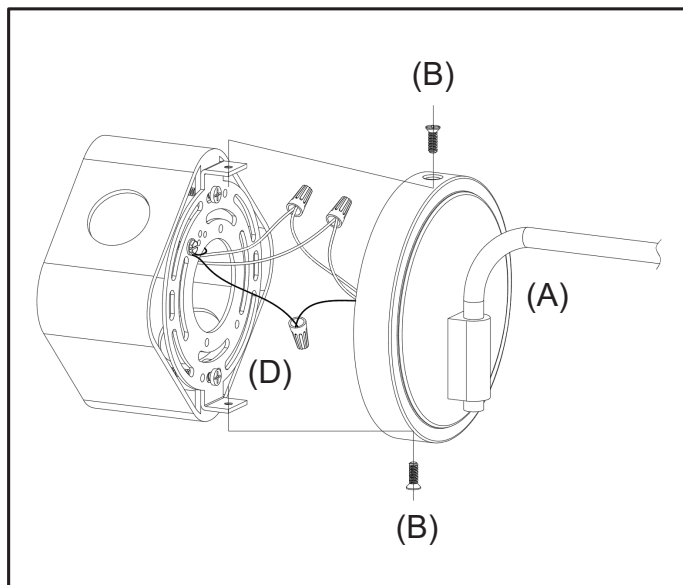

### STEP 4: INSTALL BULB AND SHADE

#### SOCKET RATING: 60W MAX Type A Bulb

\*LED bulbs permit a brighter bulb without exceeding socket rating. (See chart below)


LUMENS (lm): Light output (brightness)

KELVIN (K): Light color. (orange/golden/white/blue)

Range: 1800K (orange) to 6000K (white)

To mimic the color of an incandescent bulb, choose 2700K (Soft White).

**SHADE:** Remove Socket Ring (attached to Socket) then place Shade (F) onto Socket. Replace and tighten Ring.

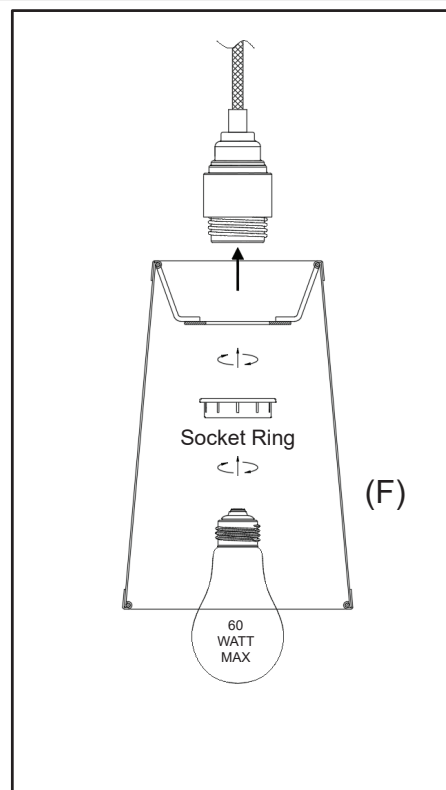


## TIP

Scan this QR Code  
to learn more  
regarding  
**LED BULBS**  
and how to best use them  
with your new fixture!

### STEP 5: RESTORE POWER

Connect Breaker and turn on Light.

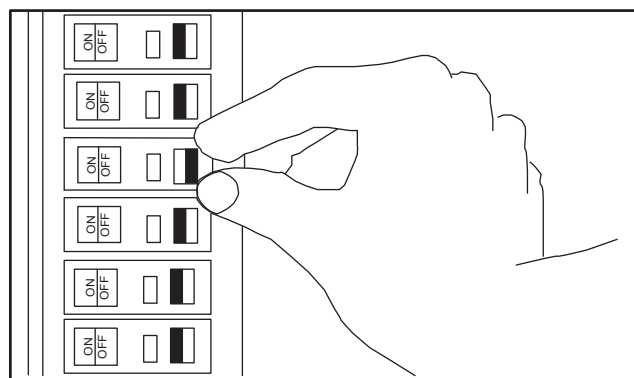

Customer Service: 800-367-2810  
Online: [www.ballarddesigns.com](http://www.ballarddesigns.com)